

Nautilus™

Seating Capacity.....	7 Adults
Dimensions	92" x 92" x 35 1/2", (234 cm x 234 cm x 90 cm)
Corner Radius	16" (41 cm)
Dry Weight.....	885 lbs (402 kg)
Filled Weight (Average Fill)	3,967 lbs (1,800 kg)
Water Capacity (Average Fill).....	370 US gallons (1,401 Liters)
Shipping Weight	885 lbs (402 kg)
Export Shipping Weight:.....	935 lbs (424 kg)
Electronic Controls	D1 SmartHUB™ full color glass touch control panel; access to control jets, temperature, settings and maintenance schedule
Pump 1	North America (60 Hz): 2-Speed, 4.0 HP break, 2.5 HP continuous, 48 Frame
Export (50 Hz):	1-Speed, 2.0 HP continuous
Pump 2	North America (60 Hz): 1-Speed, 3.6 HP break, 2.5 HP continuous, 48 Frame
Export (50 Hz):	1-Speed, 2.0 HP continuous
Circulation Pump.....	Yes
Fountain Pump	Yes
Filtration (factory default)	24/7 Filtration (Purge Cycles 2 x 10 minutes)
Total VCR Jets	40
Seat 1 Jets	3 Power Storm Multi Port
Seat 2 Jets	1 Mini Storm Rotator
Seat 3 Jets	1 Pillow Mini Storm Rotator, 2 Pillow Cluster Shower Directional, 3 Power Storm Dual Rotator, 4 Mini Storm Directional
Seat 4 Jets	2 Mini Storm Directional, 2 Mini Storm Rotator
Seat 5 Jets	1 Pillow Mini Storm Rotator, 2 Pillow Cluster Shower Directional, 4 Power Storm Rotator, 2 Power Storm Directional, 2 Mini Storm Rotator
Seat 6 Jets	4 Mini Storm Rotator
Footwell (7).....	1 Typhoon, 2 Mini Storm Directional, 4 Euro Cluster Storm Directional
Massage Selectors	2
Special Features	Tactile Therapy, Spa Status Light, 2 Flex Therapy Pillow, Aux Control
Water Management System	UltraPure System; Two 75 ft filter cartridge; 8" Weir
LED Lighting	Liquid FX
Optional	Exterior Lights
Synthetic Cabinet Colors	Adobe Tan, Stoneridge Grey, Mayan Brown
Terracina Cabinet (Optional).....	Driftwood, Cherry, Summer Pine, Vintage Cedar, Midnight Maple
Acrylic Colors	Moonstone, UltraLife, Sand, Sunstone, Smoked Marble, Blue Topaz, Gray Marble, Desert Stone
Headrests	4 (2 Standard, 2 Flex Therapy Pillow)
Water Feature.....	Fountain with independent flow rate (on or off) adjustment; powered by the fountain pump
Heater	2.1, 3.4, 5.5 kW
Export (50Hz)	2.1, 3.4, 5.5 kW
Electrical Requirements:	North America (60 Hz): 240 VAC@30A, 40A or 50A
	Export (50 Hz): 230 VAC@1x16A, 1x32A, 2x16A, 3x16A or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs
Warranty*	North America (60 Hz): Lifetime for UltraLife Shell Surface, 7 Years Acrylic Shell Surface, 5 Years Plumbing, 5 Years Equipment and Controls, Lifetime for EnviroTect Cabinet, 7 Years for Terracina Cabinet, 1 Year Water Purification System, 2 Years for Jet Insert, 1 Year for Jet Escutcheon, 2 Years Lights, 1 Year Stereo;
	Export (50 Hz): 10 Years for UltraLife Shell Surface, 7 Years Acrylic Shell Surface, 5 Years Plumbing, 5 Years Equipment and Controls, 5 Years for EnviroTect Cabinet, 2 Years for Terracina Cabinet, 1 Year Water Purification System, 2 Years for Jet Insert, 1 Year for Jet Escutcheon, 2 Years Lights, 1 Year Stereo
Audio System (Optional).....	Fully Integrated Stereo System with Bluetooth capability, 4 premium speakers and a subwoofer
Wi-Fi (Optional).....	D1 Connect App




**Optional
escutcheon jets**

*(See Warranty Document for Specific Details)

Nautilus

Massage Selector Diagram

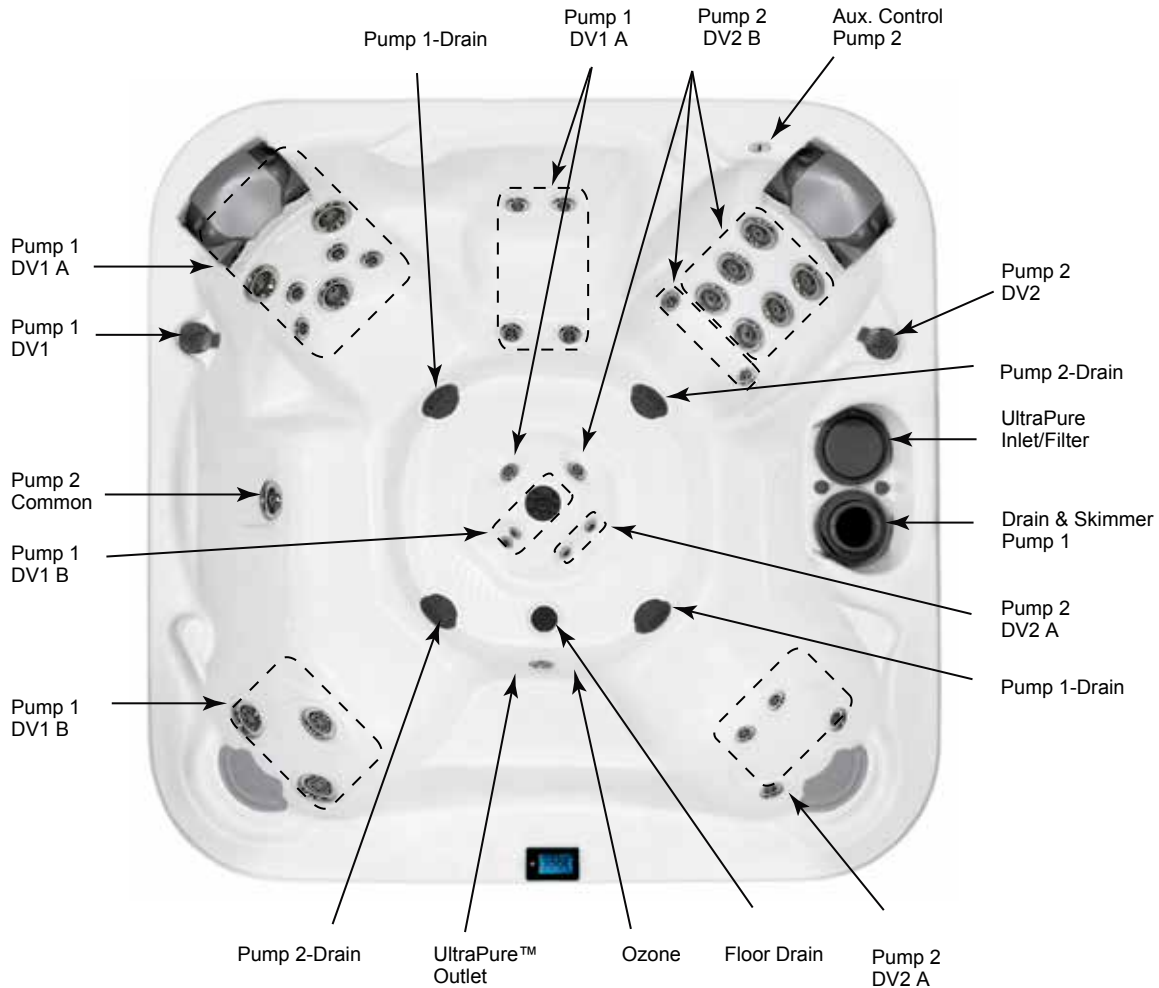

Legend:

- DV1 A = Diverter Valve 1 (A Position Clockwise)
- DV1 B = Diverter Valve 1 (B Position Counter Clockwise)
- DV1 C = Diverter Valve 1 (Neutral Position)
- DV2 A = Diverter Valve 2 (A Position Clockwise)
- DV2 B = Diverter Valve 2 (B Position Counter Clockwise)
- DV2 C = Diverter Valve 2 (Neutral Position)

Spa Operation Subject to Change without Notice

Seat Depths

- 1 = 25.00" (63.50 cm)**
- 2 = 26.00" (66.04 cm)**
- 3 = 26.00" (66.04 cm)**
- 4 = 21.00" (53.34 cm)**
- 5 = 29.00" (73.66 cm)**
- 6 = 27.00" (68.58 cm)**

- 7 = 17.00" (43.18 cm)**
- 8 = 31.00" (78.74 cm)**


Listed dimensions represent distance from top of acrylic to lowest point in seat. **Tolerance ± 0.5" (1.27 cm).**



Dimensions/Specifications are Subject to Change Without Notice

Nautilus

Jet Designation

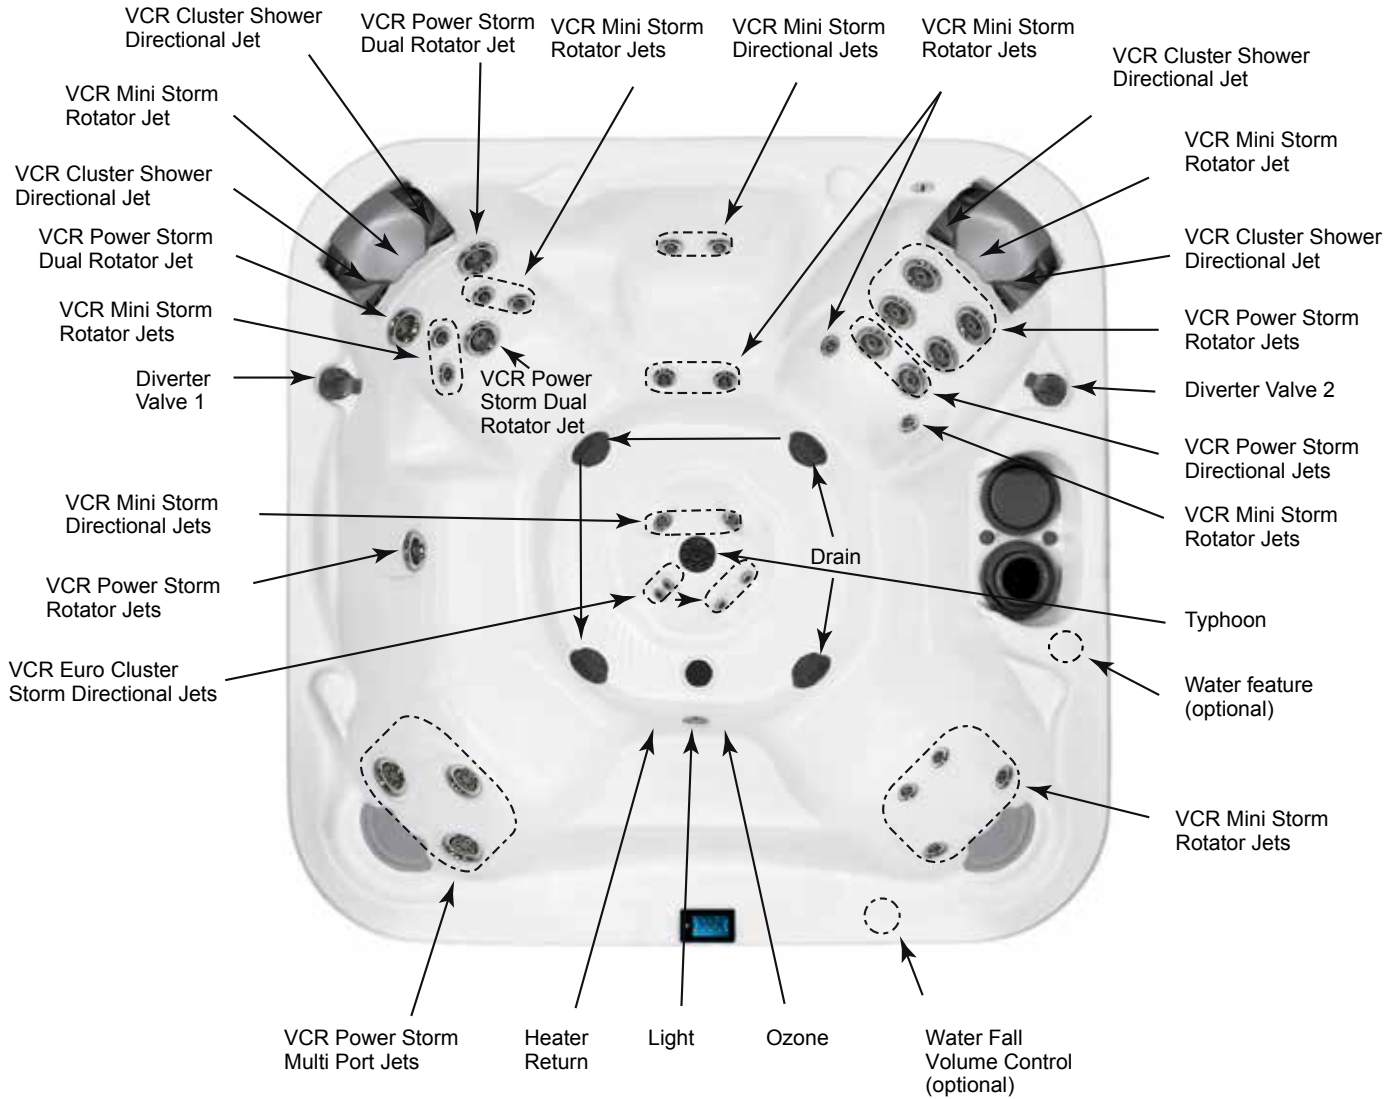

Dimensions/Operation/Specifications are Subject to Change Without Notice




40 Total Jets



Total Jets




Nautilus

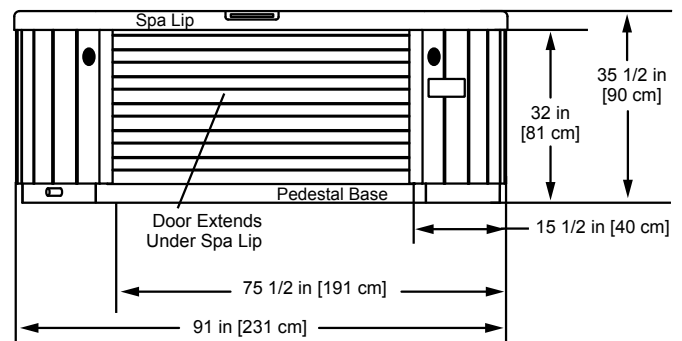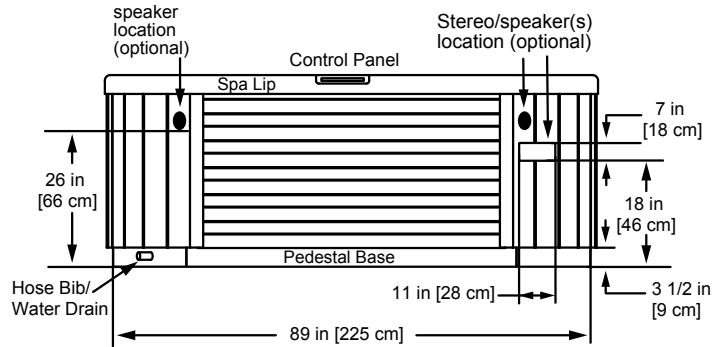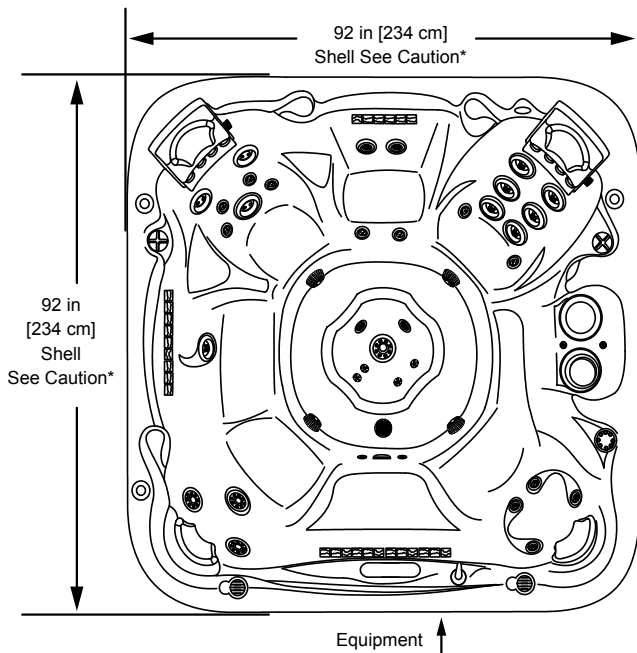

***Caution:**

Due to manufacturing tolerances there could be some minor differences between the actual spa and the drawing above. **If site planning is critical to such tolerances, be sure to measure your actual spa.**

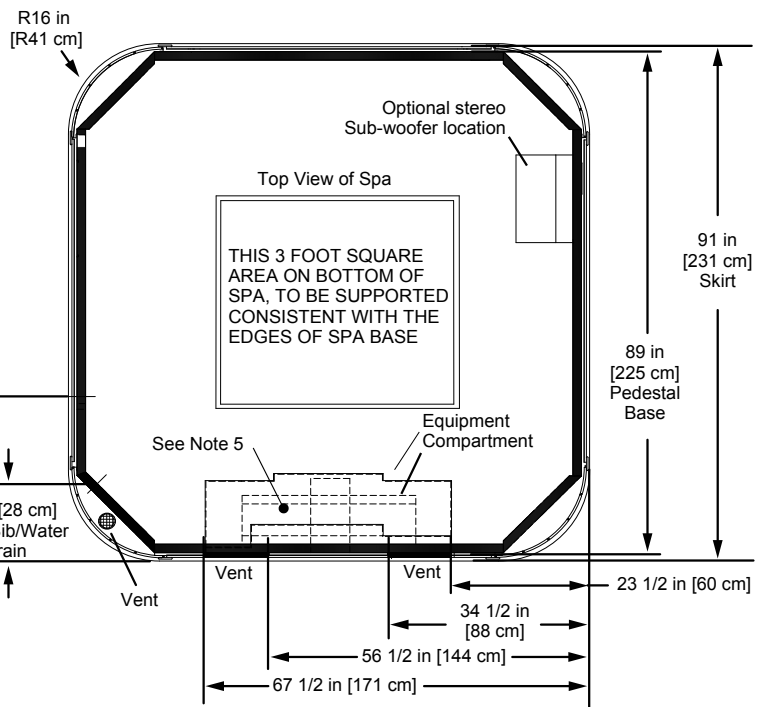

- Note:
1. Subject to change without notice.
 2. Engineering specs may differ slightly from brochure.
 3. For E-Z lifter installation allow 18" clearances on the backside of the spa.
 4. Alternative cabinets may add significant weight. Ask your dealer for exact details.
 5. This is the approximate location for drilling a hole if you must bring the power line in through the bottom of the spa. Be careful not to puncture a plumbing line inside the equipment compartment (drill from the inside compartment out).

Dimensions/Specifications are Subject to Change Without Notice (Tolerance ± 0.5" [1.27 cm]).