


Jacuzzi J-LX

Specifications

| | |
|--|---|
| Seating Capacity | 6-7 |
| Dimensions | 89" x 89" x 34" (226.06 cm x 226.06 cm x 86 cm); For complete dimensions, see page 80 |
| Dry Weight | 855 lbs (388 kg) |
| Filled Weight (Spa Volume) | 4,525 (2,052 kg) |
| Filled Weight (Average Fill) | 3,607 lbs (1,636 kg) |
| Water Capacity (Spa Volume) | 440 US gallons (1,666 Liters) |
| Water Capacity (Average Fill) | 330 US gallons (1,249 Liters) |
| Electronic Controls | ProTouch™ 2 LCD control panel, user interface displays temperature, time, cycles and fingertip jet control. Offers customizing of pre-programmed filtration cycles, heating modes and water temperature setting. |
| Pump 1 | North America (60 Hz): 1-Speed, 5.1 HP brake, 2.5 HP continuous, 56 Frame |
| Export (50 Hz): | 1-Speed, 2.0 HP continuous |
| Pump 2 | North America (60 Hz): 1-Speed, 5.1 HP brake, 2.5 HP continuous, 56 Frame |
| Export (50 Hz): | 1-Speed, 2.0 HP continuous |
| Circulation Pump | Yes, 8-hour |
| Total PowerPro® Jets | 41 (plus 2 IR Light Therapy) |
| Seat A Jets | 2 PowerPro® NX2, 2 PowerPro® RX, 2 PowerPro® FX Large Rotational, 2 PowerPro® FX |
| Seat B Jets | 2 PowerPro® FX Large Rotational, 2 PowerPro® MX, 2 PowerPro® FX |
| Seat C Jets | 4 PowerPro® RX |
| Seat D Jets | 2 PowerPro® NX2, 9 PowerPro® FX, 2 IR Light Therapy |
| Seat E Jets | 3 PowerPro® FX |
| Seat F Jets | 2 PowerPro® NX2, 2 PowerPro® RX, 1 PowerPro® FX Large Rotational, 2 PowerPro® FX |
| Seat G Jets | 2 PowerPro® NX2 |
| Massage Selector | 1 |
| Air Controls | 4, On/Off rocker switch air controller |
| Water Management System | One ProClarity® 40 ft ³ filter cartridge and 1 ProClarity® depth load filter on 8-hour circulation pump; one ProCatch® bag with ProClear® 60 ft ³ filter; Floating Weir; Factory installed CLEARRAY Active Oxygen™ Clean Water System |
| Export (50 Hz): | Factory installed CLEARRAY Active Oxygen™ Clean Water System |
| LED Lighting | Two underwater light with 4 color modes, waterfall lights, exterior corner lights |
| Cabinet | Modern Hardwood, Brushed Gray, Smoked Ebony |
| Acrylic Colors | Platinum, Porcelain |
| Headrests | 4 |
| Waterfalls | One; Independent flow rate (on or off) adjustment powered by pump 1 |
| Heater: | North America (60 Hz): 5.5 kW, High Flow |
| Export (50 Hz): | High Flow, 2.7 kW |
| Electrical Requirements: | North America (60 Hz): 240 VAC@40A, 50A, or 60A Export (50 Hz): 220-240 VAC@1x32A, 1x20A/1x16A, or 3x16A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration. |
| Warranty* | North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years for Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights; Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights |
| Audio System (Optional) | N/A |

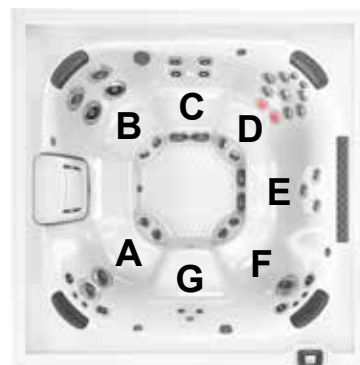


*(See Warranty Document for Specific Details)

Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-LX

Operation/Seat Depths

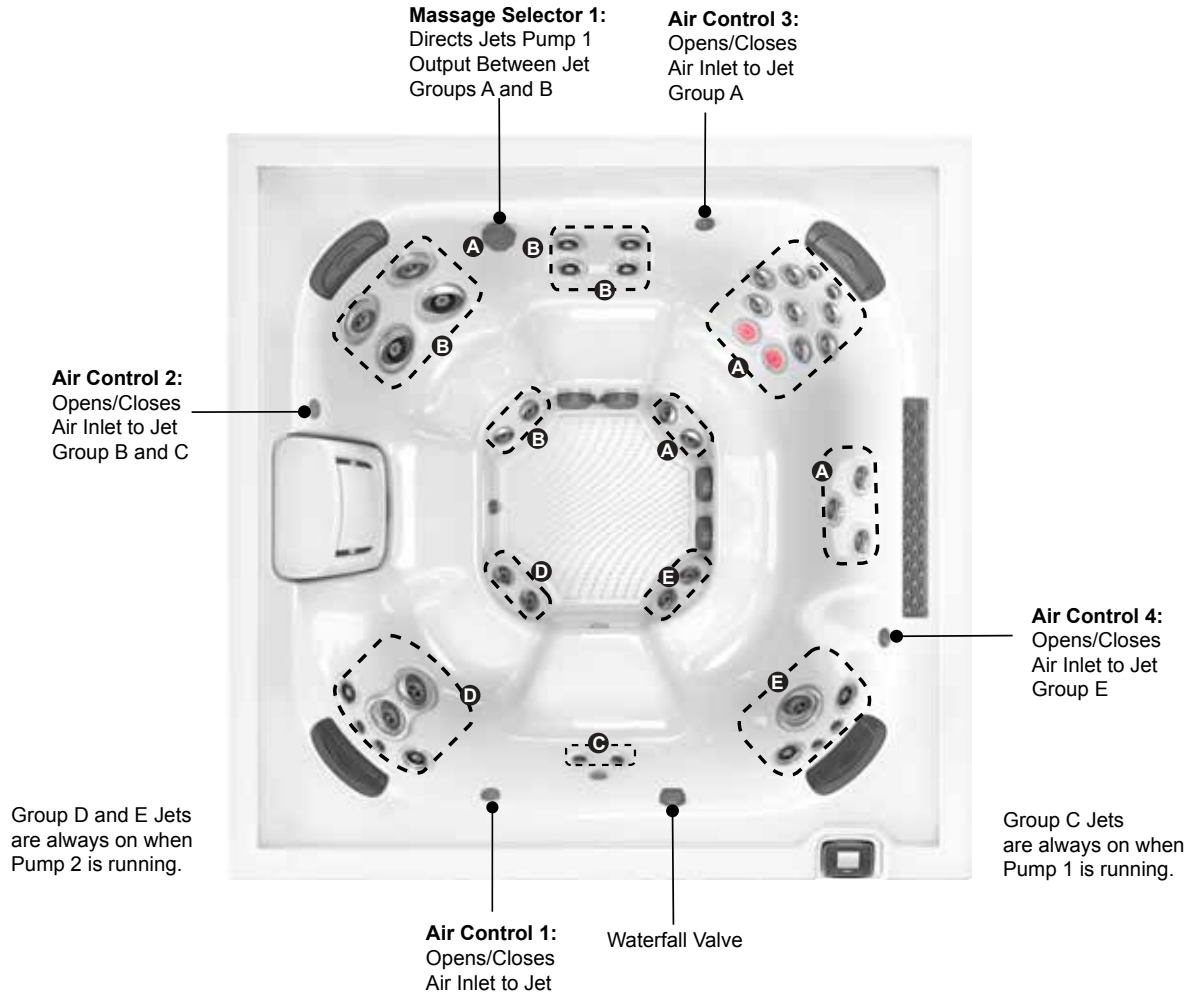

41 Total Jets (plus 2 IR Light Therapy)



Spa Operation Subject to Change without Notice

Seat Depths

A = 24.25" (61.60 cm)
B = 21.13" (53.66 cm)
C = 26.13" (66.36 cm)
D = 20.50" (52.07 cm)
E = 26.81" (68.10 cm)

F = 25.00" (63.50 cm)
G = 26.31" (66.83 cm)
H = 18.00" (45.72 cm)
I = 31.00" (78.74 cm)

Listed dimensions represent distance from top of the deck to lowest point in seat.
 Tolerance $\pm 0.5"$ (1.27 cm).




Dimensions/Specifications are Subject to Change Without Notice


Jacuzzi J-LX

Dimensions


TOP VIEW

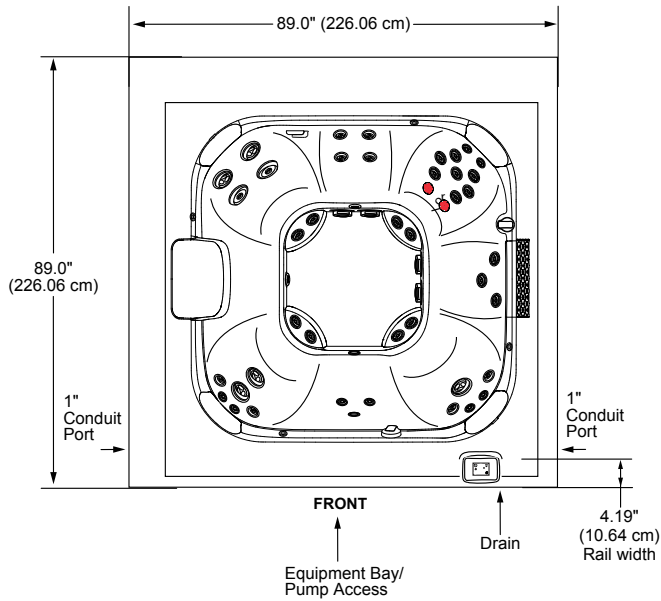


FRONT/BACK SIDE VIEW

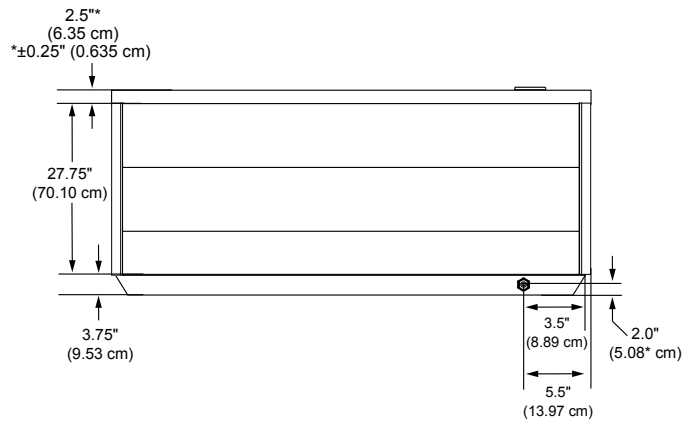

RIGHT SIDE VIEW

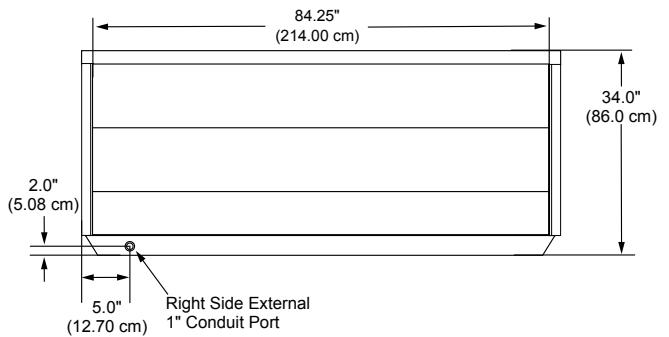

IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

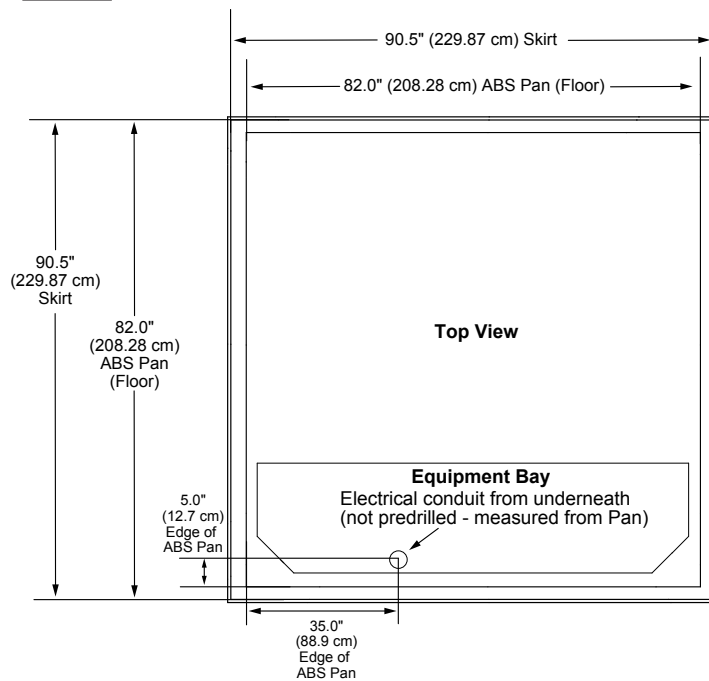

Dimensions/specifications subject to change without notice. Tolerance ±0.5" (1.27 cm)