


# Jacuzzi J-LXL

## Specifications

Seating Capacity.....	5-6
Dimensions .....	89" x 89" x 34" (226.06 cm x 226.06 cm x 86 cm); <b>For complete dimensions, see page 80</b>
Dry Weight.....	914 lbs (415 kg)
Filled Weight (Spa Volume) .....	4,625 lbs (2,098 kg)
Filled Weight (Average Fill).....	3,666 lbs (1,663 kg)
Water Capacity (Spa Volume).....	445 US gallons (1,685 Liters)- <i>Approximate</i>
Water Capacity (Average Fill).....	330 US gallons (1,249 Liters)- <i>Approximate</i>
Electronic Controls .....	ProTouch™ 2 LCD control panel, user interface displays temperature, time, cycles and fingertip jet control. Offers customizing of pre-programmed filtration cycles, heating modes and water temperature setting.
Pump 1.....	North America (60 Hz): 1-Speed, 5.1 HP brake, 2.5 HP continuous, 56 Frame
Export (50 Hz): .....	<b>1-Speed, 2.0 HP continuous</b>
Pump 2.....	North America (60 Hz): 1-Speed, 5.1 HP brake, 2.5 HP continuous, 56 Frame
Export (50 Hz): .....	<b>1-Speed, 2.0 HP continuous</b>
Circulation Pump.....	Yes, 8-hour
Total PowerPro® Jets.....	39 (Plus 2 IR Light Therapy)
Seat A Jets .....	2 PowerPro® NX2, 2 PowerPro® RX, 2 PowerPro® FX Large Rotational, 2 PowerPro® FX Rotational, 6 PowerPro® FX
Seat B Jets .....	4 PowerPro® RX
Seat C Jets .....	2 PowerPro® NX2, 7 PowerPro® FX, 2 IR Light Therapy
Seat D Jets .....	2 PowerPro® FX Rotational
Seat E Jets .....	2 PowerPro® FX Large Rotational, 2 PowerPro® MX
Seat F Jets.....	2 PowerPro® NX2
Footwell (G).....	2 PowerPro® FX, 2 PowerPro® MX
Massage Selector .....	1
Air Controls.....	3, On/Off rocker switch air controller
Water Management System.....	One ProClarity® 40 ft <sup>2</sup> filter cartridge and 1 ProClarity® depth load filter on 8-hour circulation pump; one ProCatch® bag with ProClear® 60 ft <sup>2</sup> filter; Floating Weir; Factory installed CLEARARRAY Active Oxygen™ Clean Water System
Export (50 Hz): .....	<b>Factory installed CLEARARRAY Active Oxygen™ Clean Water System</b>
LED Lighting .....	Two underwater light with 4 color modes, waterfall lights, exterior corner lights
Cabinet .....	Modern Hardwood, Brushed Gray, Smoked Ebony
Acrylic Colors .....	Platinum, Porcelain
Headrests .....	3
Waterfalls .....	One; Independent flow rate (on or off) adjustment powered by pump 1
Heater:.....	North America (60 Hz): 5.5 kW, High Flow
Export (50 Hz): .....	<b>High Flow, 2.7 kW</b>
Electrical Requirements: .....	North America (60 Hz): 240 VAC@40A, 50A, or 60A <b>Export (50 Hz): 220-240 VAC@1x32A, 1x20A/1x16A, or 3x16A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.</b>
Warranty*.....	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights; <b>Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights</b>
Audio System (Optional).....	N/A

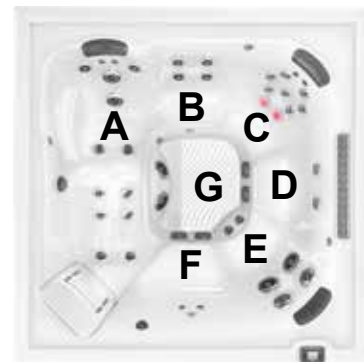


\*(See Warranty Document for Specific Details)

Dimensions/Specifications are Subject to Change Without Notice

# Jacuzzi J-LXL

## Operation/Seat Depths

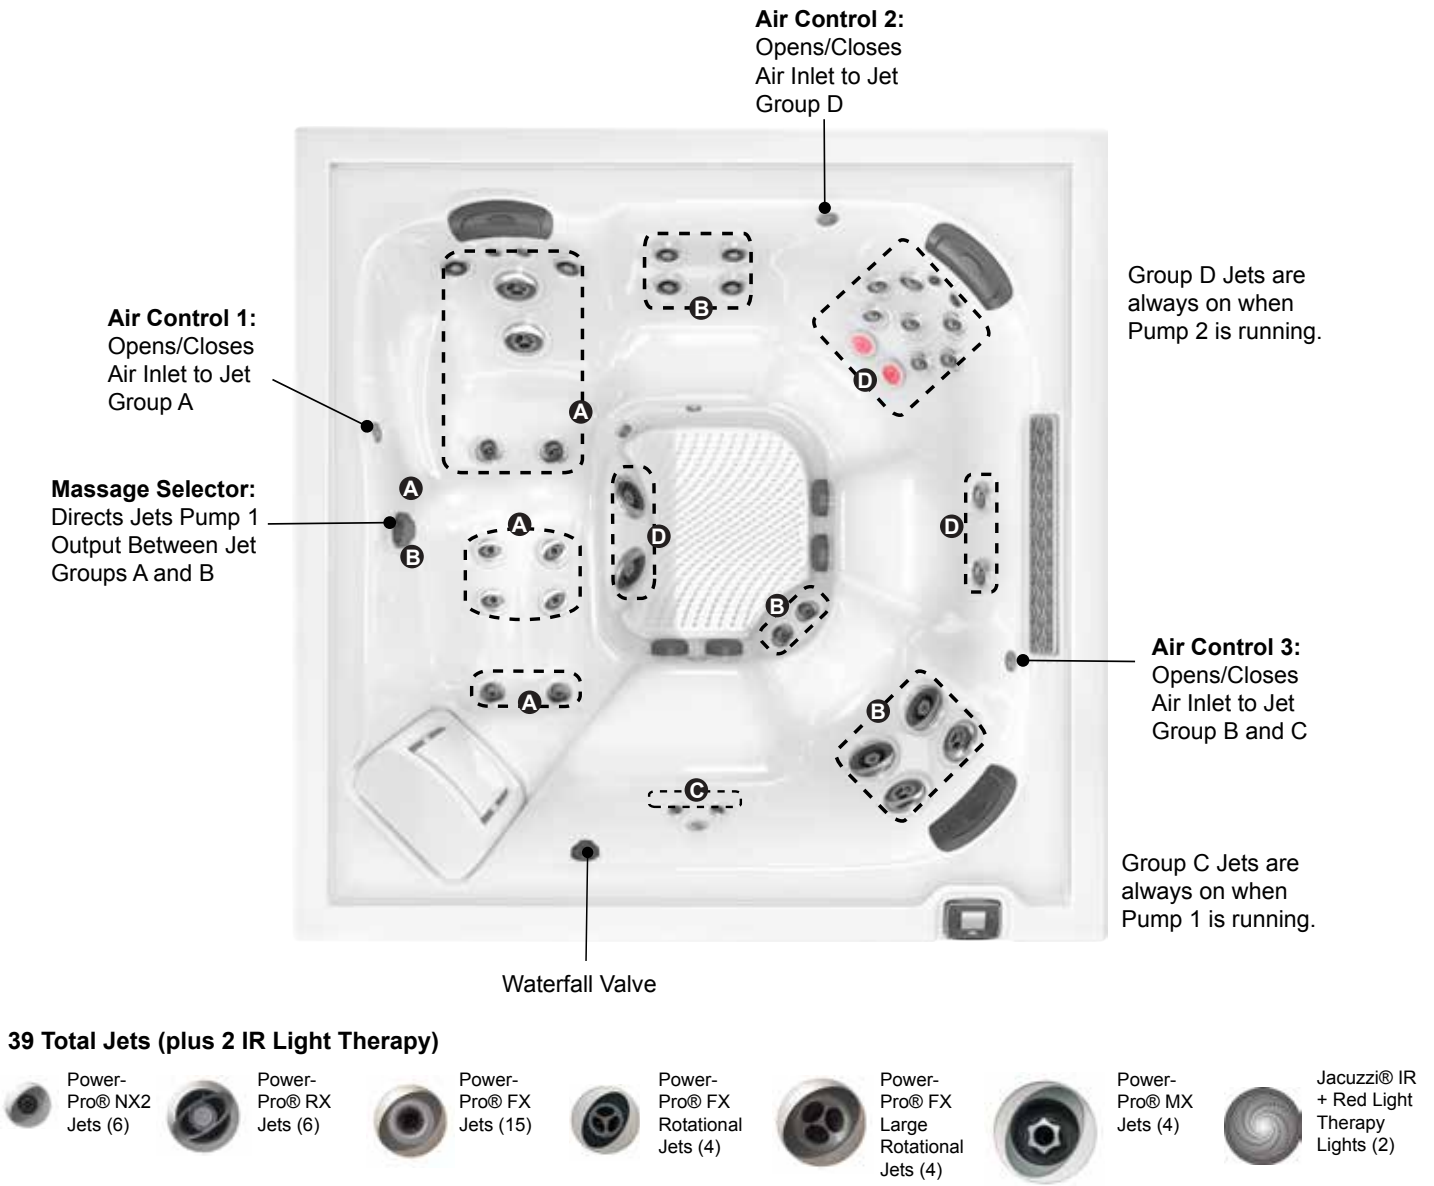


Spa Operation Subject to Change without Notice

## Seat Depths

**A = 25.00" (63.50 cm)**  
**B = 22.00" (55.88 cm)**  
**C = 27.00" (68.58 cm)**  
**D = 20.88" (53.02 cm)**  
**E = 26.25" (66.68 cm)**

**F = 18.38" (46.67 cm)**  
**G = 24.25" (61.60 cm)**  
**H = 31.00" (78.74 cm)**

Listed dimensions  
represent distance  
from top of the deck  
to lowest point in  
seat. Tolerance  $\pm 0.5"$   
(1.27 cm).

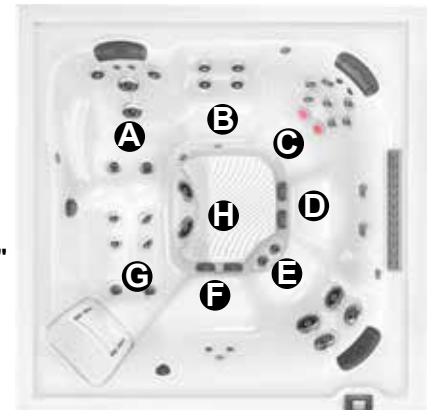


Dimensions/Specifications are Subject to Change Without Notice


# Jacuzzi J-LXL

## Dimensions


TOP VIEW

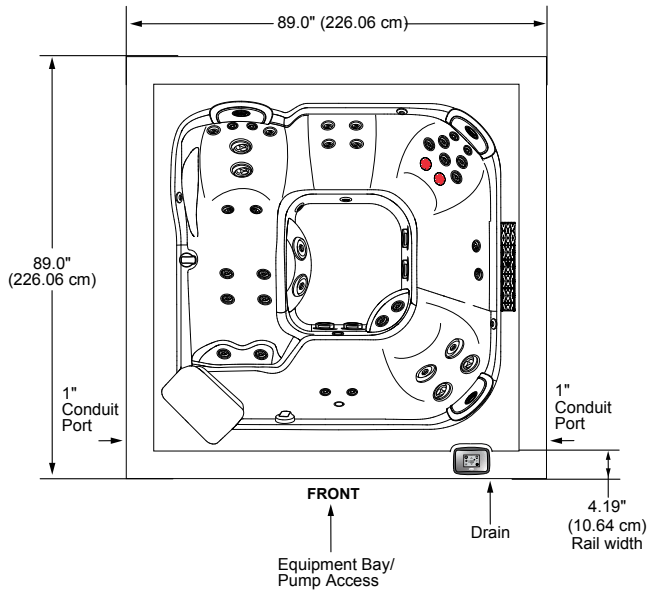


FRONT/BACK SIDE VIEW

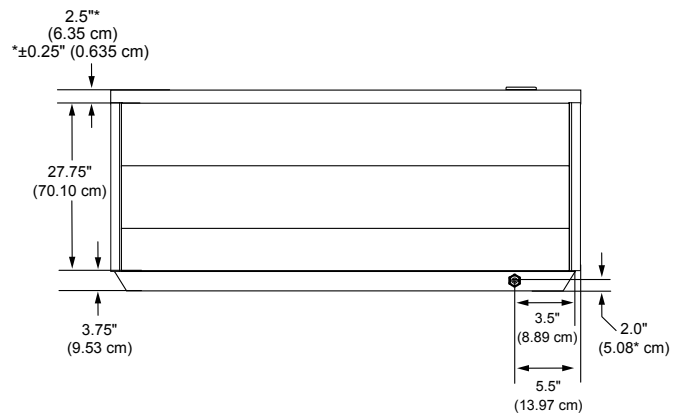

RIGHT SIDE VIEW

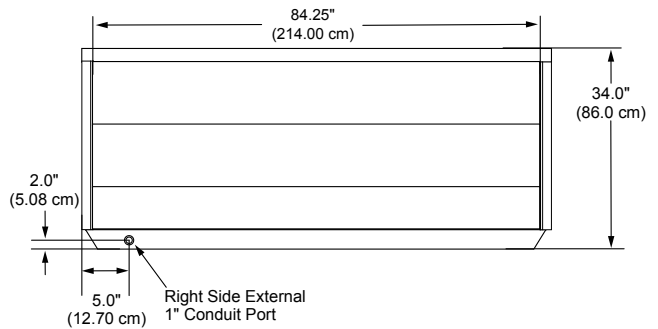

**IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.**

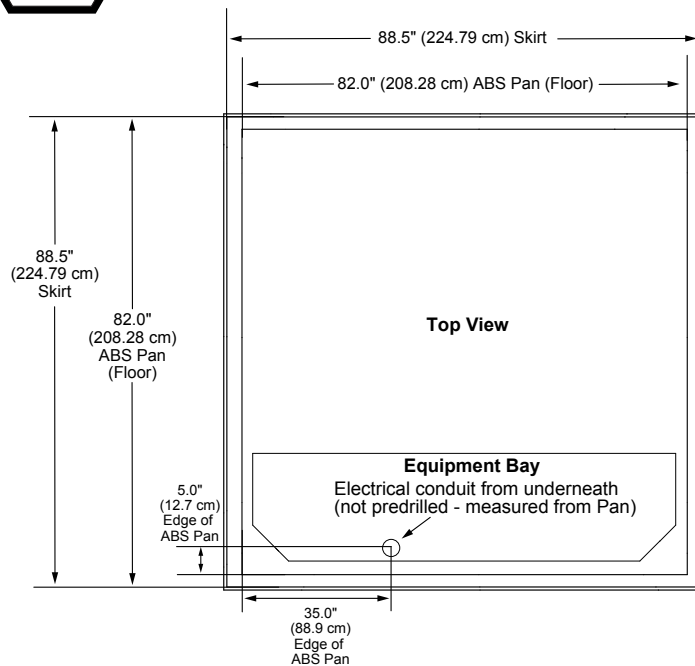

Dimensions/specifications subject to change without notice. Tolerance: ± 0.5" (1.27 cm)

Dimensions/specifications subject to change without notice. Tolerance ±0.5" (1.27 cm)